

Anchoring tension clamp for flat cables AT-UO-AOFT




*illustrative photo

DESCRIPTION:

- Minimum tensile strength 1000 N
- Maximum span 50 m
- Tool-free installation
- Harmless for the outer sheath (coating) of the cable
- Designed for flat cables

TECHNICAL SPECIFICATION

Weight [kg]	0,036
Dimension A [mm]	70
Dimension B [mm]	90
Dimension C [mm]	90
Dimension D [mm]	110
Maximum cable dimension [mm]	9x4 mm
Material	Stainless steel
Temperature	-40°C - +60°C

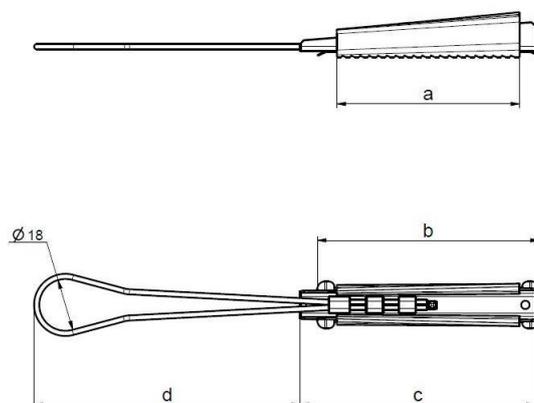

ORDERING

AT-UO-AOFT – Anchoring clamp for flat cables AERO DF.

This document and the statements contained in it, are not intended for customers within the meaning of Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only, and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot in any case be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed